



400 V



YouTube  
Directly to the  
product video!

optional:  
Second  
help-arm  
(see TW X-98)



optional:  
hole adapter (can also  
be used on all of our  
tyre balancers)



optional: TW X-ROLL  
Roll board (can be  
used on all of our  
tyre changers)



## Tyre changer

Item No.: TW X-93

### Description

Top tyre changer with a new type of clamping system, optimal for sensitive aluminium rims. The wheel is mounted on a spindle using a centering cone (incl. 4 pcs.) and a quick-locking clamp in connection with a bayonet lock.

### Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Self centering wheel mounting system
- Mounting shaft with quick release system
- 1 Help-arm for professional use
- Wheel lifter
- Mounting head can be moved to the side
- Pneumatic mounting head adjustment
- Large clamping range for cars and vans
- High quality stainless steel components in the inner part
- Precise control block with STOP function
- Powerful bead breaker (2500 kg)
- Powerful electrical motor

### Delivery contents


Tyre changer with maintenance unit | Air filler and lifting lever |  
Plastic protectors for aluminium rims (3 pcs.)

### Details



(1) Help-arm for professional use (2) Comfortable and clear tire inflator  
(3) Self centering wheel mounting system (4) Wheel lifter

### Dimensions | Technical data | Accessories

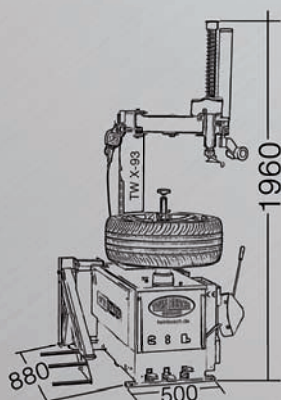

Extensive accessories

#### Technical Data: TW X-93

Wheel diameter (max.)	45" (1143 mm)
Wheel width (max.)	16" (406 mm)
Bead breaker force	2500 kg
Air supply	8 bar
Power supply	400 V
Motor power	0,75 kW
Noise level	<70 dB
Weight (approx.)	269 kg