

Longneck angle milling/drilling unit LWB/BL



EdPLIT

Longneck angle milling/drilling unit LWB/BL

BRUSHLESS

Brushless motors and advanced power electronics:
maximum performance in a compact design!



LWB/BL

BRUSHLESS



230V



250 W



16.000



SOLO

NO 29 207

LONGNECK-SET


BRUSHLESS

LWB/BL +LHW/BL
in L-BOXX 102

NO 29 290




Unsurpassed versatility thanks to longneck gear head made of die-cast aluminum.

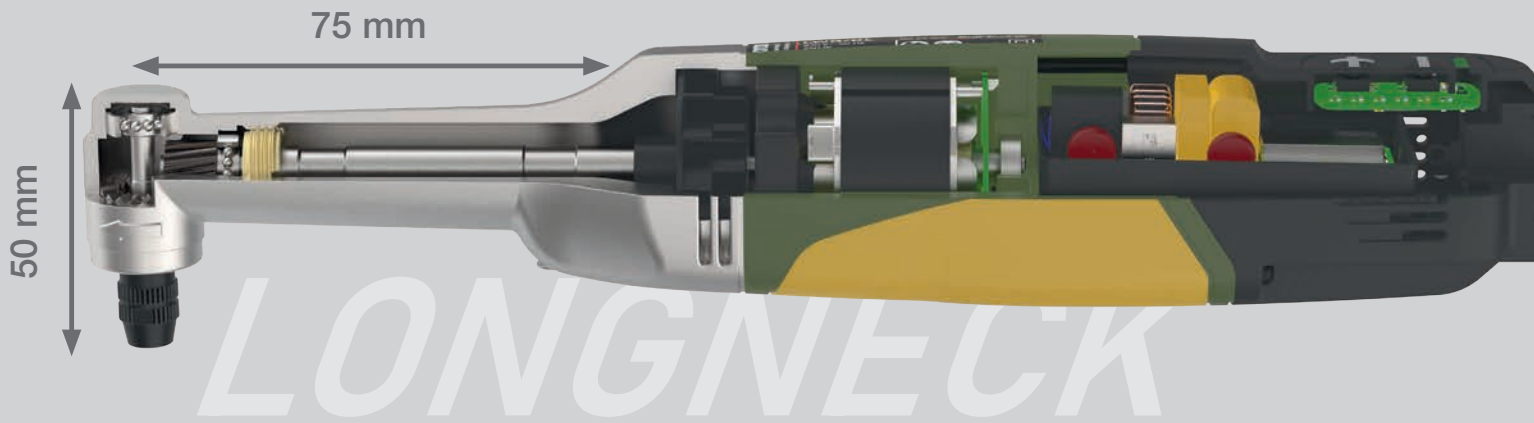

Diamond cutting disc SLIM Cut 45

Extremely thin, precise cuts. For sharp edges with almost no chipping. For porcelain stoneware, natural stone (granite, marble), ceramic materials. Thickness 0.6mm. Shaft 3.2mm. Ø 45mm.

NO 28 848

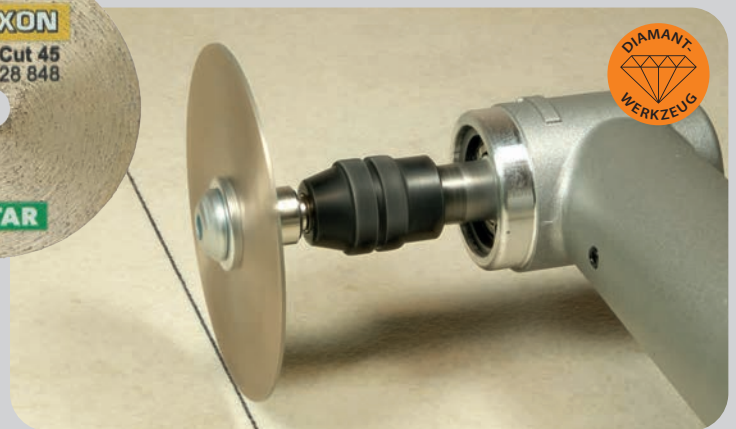

Diamond-coated cutting disc UNI Cut 45

Fast, thin, clean cuts. All-rounder. For porcelain stoneware, natural stone (granite, marble), ceramic materials, glass. With flat diamond coating (10mm). Thickness 0.9mm. Shaft 3.2mm. Ø 45mm.

NO 28 849



Diamond-coated grinding bits

For grinding radii, e.g. in cut-outs. For porcelain stoneware, natural stone (granite, marble), ceramic materials, glass. Ø 5mm. Shaft 3.2mm. 2 pieces.

NO 28 246



Longneck-Set



High-performance duo for tile contractors!

LHW/BL



230V



250 W



16.000
max



50



550



270mm



2.20m



LWB/BL



230V



250 W




16.000
max



550



270mm



2.20m



LONGNECK

The two longneck models LHW/BL and LWB/BL in proven L-BOXX system. With a high-quality form insert. Plenty of space for accessories.

NO 29 290

With tabless technology for the most demanding applications.



Lithium-ion battery Li/TL3 **TABLESS**

Particularly suitable for energy-intensive tools such as LHW/A. Designed for high charging currents and therefore short charging times. Reaches approximately 95% of its capacity in the SuperCharger SC after around 15 minutes. Increased efficiency thanks to reduced heat loss and delayed safety shutdown in the event of overheating.

Technical Data:

10.8V. 3.0Ah. Length 85mm. Weight 180g.

NO 29 894

Ah
3.0



SuperCharger SC

For lightning-fast charging!



230V



10.8V



8 A

Charges the Tabless Li/TL3 battery from 0 to approximately 95% of its capacity in around 15 minutes. With active cooling and intelligent temperature monitoring. Housing prepared for wall mounting. Not compatible with the Li/A2 battery.

Technical Data:

230V. 50/60Hz. Output 12.6V, 8A. Weight 380g.

NO 29 882



Basic-Set LBX/TL3

Professional starter set with two high-performance batteries Li/TL3 and SuperCharger SC.

In proven L-BOXX-system. With thermoformed insert for two cordless tools. For a customised selection of two cordless tools for applications such as stone and tile treatment, metal construction, for the automotive sector, car body shops, welding, interior work or maintenance. Plenty of space for accessories.

Technical Data:

Charger 230V. 50/60Hz. Output 12.6V, 8A. Weight 380g.

Battery 10.8V. 3.0Ah. Length 85mm. Weight 180g.

NO 29 905

