

Longneck angle grinder LHW/BL



- For precise cutting right into corners with a cutting depth of 14mm.
- Unsurpassed versatility thanks to longneck gear head made of die-cast aluminum.



Longneck angle grinder LHW/BL

BRUSHLESS

Brushless motors and advanced power electronics:
Maximum performance in a compact design!



Speed selection with
memory-function and
LED-display



250 W

Brushless-Motor

Patented angle gear box

LONGNECK



LHW/BL

BRUSHLESS



230V



250 W



16.000



SOLO


NO 29 202

LONGNECK-SET

BRUSHLESS

LHW/BL + LWB/BL
in L-BOXX 102

NO 29 290

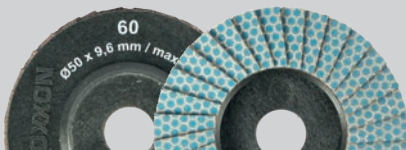

Diamond-coated flap discs

Sanding of cutting edges, breaking of edges and creation of clean chamfers in porcelain stoneware, natural stone (granite, marble), ceramic materials and glass. Optimised tool geometry for perfect corner sanding. Ø 50mm. 2 pieces.

NO 28 166 Grit 60

NO 28 167 Grit 120

NO 28 168 Grit 200



Diamond sanding discs

For sanding and polishing cutting edges and chamfers. Also for breaking edges beforehand and creating clean chamfers. For porcelain stoneware, natural stone (granite, marble), ceramic materials, glass. Self-adhesive. 6 pieces.

NO 28 675 Grit 120


NO 28 676 Grit 200

NO 28 677 Grit 400

Set of diamond sanding discs

One disc each of grit 60 – 120 – 200 – 400 – 800 – 1,500 – 3,000. Including one foam backing pad.

NO 28 679 7 pieces



Diamond-coated cutting disc UNI Cut 50

Fast, thin, clean cuts. All-rounder. For porcelain stoneware, natural stone (granite, marble), ceramic materials, glass. With surface diamond coating (10mm). Thickness 0.9mm.

NO 28 156



With tabless technology for the most demanding applications.



Lithium-ion battery Li/TL3 **TABLESS**

Particularly suitable for energy-intensive tools such as LHW/A. Designed for high charging currents and therefore short charging times. Reaches approximately 95% of its capacity in the SuperCharger SC after around 15 minutes. Increased efficiency thanks to reduced heat loss and delayed safety shutdown in the event of overheating.

Technical Data:

10.8V. 3.0Ah. Length 85mm. Weight 180g.

NO 29 894

Ah
3.0



SuperCharger SC

For lightning-fast charging!



230V



10.8V



8 A

Charges the Tabless Li/TL3 battery from 0 to approximately 95% of its capacity in around 15 minutes. With active cooling and intelligent temperature monitoring. Housing prepared for wall mounting. Not compatible with the Li/A2 battery.

Technical Data:

230V. 50/60Hz. Output 12.6V, 8A. Weight 380g.

NO 29 882



Basic-Set LBX/TL3

Professional starter set with two high-performance batteries Li/TL3 and SuperCharger SC.

In proven L-BOXX-system. With thermoformed insert for two cordless tools. For a customised selection of two cordless tools for applications such as stone and tile treatment, metal construction, for the automotive sector, car body shops, welding, interior work or maintenance. Plenty of space for accessories.

Technical Data:

Charger 230V. 50/60Hz. Output 12.6V, 8A. Weight 380g.

Battery 10.8V. 3.0Ah. Length 85mm. Weight 180g.

NO 29 905

